


SPECIALTY

UL FLEX DUCT

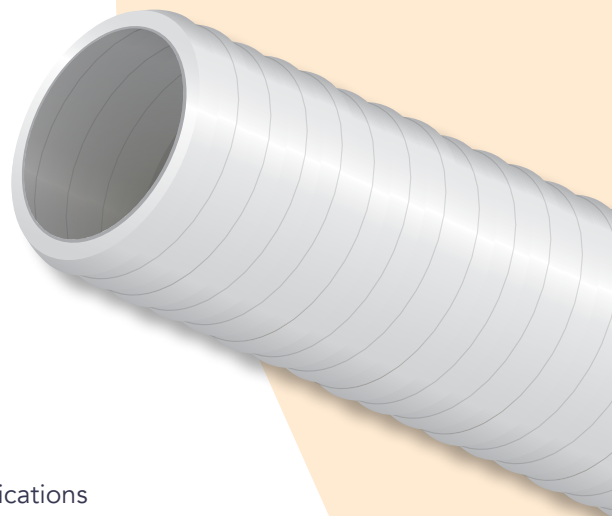

- ▶ Non-metallic, liquid-tight flexible conduit
- ▶ UL listed for sizes 1/2" – 2" (1660, Type B)
- ▶ Sunlight (UV) resistant
- ▶ Flexible PVC: eliminates the need for special preformed bends
- ▶ Excellent cable protection from ground line to meter/service box
- ▶ Used for cable protection and above and below ground installation applications
- ▶ UL listed for use in continuous temperatures from 105 C (221 F) Dry, 60 C (140 F) Wet, or 80 C (176 F) Dry, 60 C (140 F) Wet, 70 C (158 F) oil resistant or less
- ▶ Use fittings identified for Type B conduit or use fittings for liquid-tight flexible metal conduit. FNMC-B is directly marked on non-metallic fittings that are intended for integral conduit

INSTALLATION TYPES

Cable Protection
Above and Below Ground

SIZE RANGE

1/2"	1 1/2"
3/4"	2"
1"	4"
1 1/4"	

STANDARD COLORS



ORDER REFERENCE

DESCRIPTION	NOM OD (IN)	NOM ID (IN)	WEIGHT/COIL (LBS)	COIL LENGTH (FT)	PART #
1/2" UL Flex Duct	0.840	0.642	15	100	20001541
3/4" UL Flex Duct	1.050	0.840	22	100	20000409
1" UL Flex Duct	1.315	1.066	30	100	20000410
1 1/4" UL Flex Duct	1.660	1.410	20	50	20000411
1 1/2" UL Flex Duct	1.900	1.600	24	50	20000412
2" UL Flex Duct	2.375	2.045	32	50	20000413
4" UL Flex Duct	4.530	4.045	180	100	20005285



An Orbia Connectivity Solutions business.

+1 800 847 7661
WWW.DURALINE.COM

TL9000

